The advertisement features a collection of colorful hoses (yellow, blue, green, red, and clear) arranged in a dynamic, overlapping fashion. The hoses are set against a background of a globe with a grid pattern, suggesting global reach. A vertical wooden-textured bar is positioned on the right side of the image, containing the company's contact information. The overall aesthetic is professional and industrial.

23540 Telo Avenue, Torrance, CA 90505

(310) 539-1822 / (323) 775-4001

1-888-PEI-HOSE (734-4673) / 1-800-421-5196

Fax (310) 539-5826

www.pacificecho.com

email: hose@pacificecho.com

PACIFIC ECHO, INC.



SPIRALITE FEATURES AND BENEFITS

CONSTRUCTION:

- **MATERIALS:** Pacific Echo hose is made from only virgin materials, providing a clean, non-marking product. Recycled and reground materials are never used.
- **HELIX:** Rigid to resist impact and crushing.
- **WALL AND COVER:** Simultaneously extruded using a patented process to achieve maximum adhesion and flexibility.
- **TUBE:** Smooth bore will not trap contaminants and provides high flow rates. Close tolerances on inside diameter ensure easy, secure coupling.

QUALITY AND VERSATILITY:

Spiralite hoses can replace much more expensive hoses in many applications. Pacific Echo even has formulations for cold weather applications, food and chemical handling.

Each hose is color coded for easy identification and resistance to sun and ultraviolet light.

Spiralite PVC hoses are flame resistant. While they will burn initially, they will self-extinguish after a brief time.

WAREHOUSE LOCATIONS:



- 23540 TELO AVENUE
TORRANCE, CA 90505
(310) 539-1822
- 860 THOMAS DRIVE
BENSENVILLE, IL 60106
(847) 891-8610
- 1903 TELLEPSEN
HOUSTON, TX 77023
(713) 926-4500
- 63 SECOND AVENUE
TRENTON, NJ 08638
(609) 586-3300
- 2515 SHADER ROAD
ORLANDO, FL 32804
(407) 645-3595

CAUTION

YOU MUST OBTAIN WRITTEN CONSENT BEFORE USING OUR PRODUCTS WITH MATERIALS CONSIDERED POTENTIALLY HAZARDOUS BY THE MATERIAL MANUFACTURER'S MATERIAL SAFETY DATA SHEET RATING.



SPIRALITE® 090

PVC ALL-WEATHER SUCTION HOSE

• **APPEARANCE/CONSTRUCTION:**

Clear PVC with white helix.
Smooth cover and interior.

• **BENEFITS:**

- Specially compounded PVC designed to retain flexibility even at low temperatures.
- Clear wall allows easy inspection of material flow.

• **GENERAL APPLICATIONS:**

- General suction for water & light chemical solutions.

• **TEMPERATURE RANGE:**

-30°F to +130°F

• **STANDARD LENGTHS:**

3/4" thru 6" 100ft.
8" and above 20' 25' 30'

NOMINAL SIZE	inch	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
APPROX. O.D.	inch	1.02	1.29	1.56	1.84	2.39	2.92	3.46	4.56	5.65	6.80	8.95	11.34	13.39
RECOMMENDED W.P. AT 68°F	psi	100	100	90	90	70	65	55	50	45	45	40	40	35
W.P. AT 140°F	max psi	42	42	42	42	37	32	28	28	-	-	-	-	-
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	3	4	4	5	7	8	12	20	23	34	40	50
APPROX. B.P. AT 68°F	psi	300	300	270	270	210	195	165	150	135	135	120	120	105
APPROX. WT.	lbs./ft.	.21	.29	.38	.49	.71	.98	1.28	2.02	2.97	4.39	6.76	11.88	15.07

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® 110

PVC GREEN STANDARD SUCTION HOSE

• **APPEARANCE/CONSTRUCTION:**

Green PVC with white helix.
Smooth wall and interior.

• **BENEFITS:**

- Highly versatile and durable.
- Smooth interior prevents material blockage.

• **GENERAL APPLICATIONS:**

- General suction for water & light chemical solutions.

• **TEMPERATURE RANGE:**

-10°F to +130°F

• **STANDARD LENGTHS:**

3/4" thru 6" 100ft.
8" and above 20' 25' 30'

NOMINAL SIZE	inch	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
APPROX. O.D.	inch	1.01	1.27	1.53	1.82	2.36	2.90	3.44	4.52	5.65	6.80	8.95	11.34	13.39
RECOMMENDED W.P. AT 68°F	psi	100	90	90	90	70	65	55	50	45	45	40	40	35
W.P. AT 140°F	max psi	42	42	42	42	37	32	28	28	-	-	-	-	-
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28	28	28	28	26
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	3	4	5	6	8	9	13	21	24	35	41	53
APPROX. B.P. AT 68°F	psi	300	270	270	270	210	195	165	150	135	135	120	120	105
APPROX. WT.	lbs./ft.	.20	.27	.36	.47	.66	.92	1.20	1.87	3.00	4.56	7.05	12.37	15.66

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® 111

PVC SPECIAL GRAY STANDARD SUCTION HOSE

NOMINAL SIZE	inch	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"
APPROX. O.D.	inch	1.01	1.27	1.53	1.82	2.36	2.90	3.44	4.52	5.65	6.80
RECOMMENDED W.P. AT 68°F	psi	100	90	90	90	70	65	55	50	45	45
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	3	4	5	6	8	9	13	21	24
APPROX. B.P. AT 68°F	psi	300	270	270	270	210	195	165	150	135	135
APPROX. WT.	lbs./ft.	.20	.27	.36	.47	.66	.92	1.20	1.87	3.00	4.56

* BEND RADIUS FOR CONTINUOUS SERVICE.

• **APPEARANCE/CONSTRUCTION:**

Gray PVC with white helix.
Smooth wall and interior.

• **BENEFITS:**

- Excellent blend of economy and quality.
- Smooth interior prevents material blockage.

• **GENERAL APPLICATIONS:**

- General suction for water & light chemical solutions.

• **TEMPERATURE RANGE:**

-10°F to +130°F

• **STANDARD LENGTHS:**

3/4" thru 6" 100ft.



SPIRALITE® 113

PVC SPECIAL GREEN STANDARD SUCTION HOSE

NOMINAL SIZE	inch	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"
APPROX. O.D.	inch	1.00	1.25	1.51	1.81	2.34	2.88	3.42	4.49	5.58	6.80	8.94
RECOMMENDED W.P. AT 68°F	psi	100	90	70	70	60	60	50	45	45	45	40
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	3	4	5	6	8	9	13	21	24	40
APPROX. B.P. AT 68°F	psi	300	270	210	210	180	180	150	135	135	135	120
APPROX. WT.	lbs./ft.	.20	.26	.32	.45	.63	.90	1.16	1.82	3.00	4.56	7.05

* BEND RADIUS FOR CONTINUOUS SERVICE.

• **APPEARANCE/CONSTRUCTION:**

"Special" Green PVC tube with white PVC helix. Smooth wall and interior.

• **BENEFITS:**

- Excellent blend of economy and quality.
- Smooth interior prevents material blockage.

• **GENERAL APPLICATIONS:**

- General suction for water & light chemical solutions.

• **TEMPERATURE RANGE:**

-10°F to +130°F

• **STANDARD LENGTHS:**

3/4" thru 6" 100ft.
8" 20' 25' 30'



SPIRALITE® 115

PVC CLEAR STANDARD SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Clear PVC with white helix.
Smooth wall and interior.
- **BENEFITS:**
 - Highly versatile and durable.
 - Smooth interior prevents material blockage.
 - Clear wall allows easy inspection of material flow.
- **GENERAL APPLICATIONS:**
 - General suction for water & light chemical solutions.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
3/4" thru 6" 100ft.
8" and above 20' 25' 30'

NOMINAL SIZE	inch	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
APPROX. O.D.	inch	1.01	1.27	1.53	1.82	2.36	2.90	3.44	4.52	5.65	6.80	8.95	11.34	13.39
RECOMMENDED W.P. AT 68°F	psi	100	90	90	90	70	65	55	50	45	45	40	40	35
W.P. AT 140°F	max psi	42	42	42	42	37	32	28	28	-	-	-	-	-
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28	28	28	28	26
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	3	4	5	6	8	9	13	21	24	35	41	53
APPROX. B.P. AT 68°F	psi	300	270	270	270	210	195	175	150	135	135	120	120	105
APPROX. WT.	lbs./ft.	.20	.27	.34	.47	.66	.92	1.20	1.87	3.00	4.42	6.81	12.10	15.30

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® 120

PVC GREEN STANDARD SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Green PVC with white helix.
Corrugated cover, smooth interior.
- **BENEFITS:**
 - Good combination of durability and flexibility.
 - Smooth interior prevents material blockage.
- **GENERAL APPLICATIONS:**
 - General suction for water & light chemical solutions.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
1-1/2" thru 6" 100ft.
8" and above 20' 25' 30'

NOMINAL SIZE	inch	1 1/2"	2"	2 1/2"	3"	4"	6"	8"	10"	12"
APPROX. O.D.	inch	1.87	2.41	2.98	3.54	4.65	6.98	9.14	11.30	13.31
RECOMMENDED W.P. AT 68°F	psi	50	40	40	35	35	35	35	30	25
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	21	15
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3	4	5	6	8	15	18	28	36
APPROX. B.P. AT 68°F	psi	150	120	120	105	105	105	105	90	75
APPROX. WT.	lbs./ft.	.38	.58	.79	1.07	1.70	4.26	6.57	9.37	11.11

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® 124-PS

PVC PIPE-SIZED CORRUGATED SUCTION HOSE

NOMINAL SIZE	inch	23/8"	31/2"	41/2"	65/8"	85/8"
APPROX. O.D.	inch	2.85	4.15	5.26	7.60	9.80
RECOMMENDED W.P. AT 68°F	psi	40	35	30	30	30
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	4	7	9	17	22
APPROX. BP AT 68°F*	psi	120	95	90	90	90
APPROX. WT.	lbs./ft.	.72	1.19	1.85	4.41	6.67

* BEND RADIUS FOR CONTINUOUS SERVICE.

- **APPEARANCE/CONSTRUCTION:**
Clear PVC with white helix.
Corrugated cover, smooth interior.
- **BENEFITS:**
 - Specially sized to fit over pipe.
 - Smooth interior prevents material blockage.
 - Clear wall allows easy inspection of material flow.
- **GENERAL APPLICATIONS:**
 - Landfill gas recovery.
 - Water/light chemical suction and transfer.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
2-3/8" thru 6-5/8" 100ft.
8-5/8" 20' 25' 30'



SPIRALITE® 125

PVC CLEAR CORRUGATED SUCTION HOSE

NOMINAL SIZE	inch	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
APPROX. O.D.	inch	.99	1.26	1.61	1.86	2.44	2.98	3.54	4.65	5.73	6.98	9.14	11.30	13.27
RECOMMENDED W.P. AT 68°F	psi	50	35	50	50	40	40	35	35	30	35	35	30	25
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28	28	28	21	15
RECOM. MIN. BEND RADIUS AT 68°F*	inch	1	2	3	3	4	5	6	8	11	15	18	28	36
APPROX. B.P. AT 68°F	psi	150	105	150	150	120	120	105	105	90	105	105	90	75
APPROX. WT.	lbs./ft.	.11	.14	.31	.37	.57	.77	1.04	1.65	2.34	4.08	6.34	9.10	10.14

* BEND RADIUS FOR CONTINUOUS SERVICE.

- **APPEARANCE/CONSTRUCTION:**
Clear PVC with white helix.
Corrugated cover, smooth interior.
- **BENEFITS:**
 - Good combination of durability and flexibility.
 - Smooth interior prevents material blockage.
 - Clear wall allows easy inspection of material flow.
- **GENERAL APPLICATIONS:**
 - General suction for water & light chemical solutions.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
3/4" thru 6" 100ft.
8" thru 12" 20' 25' 30'
8" also in 50'



SPIRALITE® 140


PVC CLEAR FDA CORRUGATED SUCTION HOSE

NOMINAL SIZE	inch	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
APPROX. O.D.	inch	.99	1.26	1.61	1.86	2.44	2.98	3.54	4.65	5.73	6.98	9.14	11.30	13.27
RECOMMENDED W.P. AT 68°F	psi	50	35	50	50	40	40	35	35	30	35	35	30	25
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28	28	28	21	15
RECOM. MIN. BEND RADIUS AT 68°F*	inch	1	2	3	3	4	5	6	8	11	15	18	28	36
APPROX. B.P. AT 68°F	psi	150	105	150	150	120	120	105	105	90	105	105	90	75
APPROX. WT.	lbs./ft.	.11	.14	.31	.37	.57	.77	1.04	1.65	2.34	4.08	6.34	9.10	10.14

* BEND RADIUS FOR CONTINUOUS SERVICE.

- **APPEARANCE/CONSTRUCTION:**
Clear PVC with white helix.
Corrugated cover, smooth interior.
- **BENEFITS:**
 - Non-toxic formula conforms with FDA requirements.
 - Smooth interior prevents material blockage.
- **GENERAL APPLICATIONS:**
 - Food processing/handling.
 - USDA meat and poultry plants.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**

3/4" thru 6"	100ft.
8" and above	20' 25' 30'

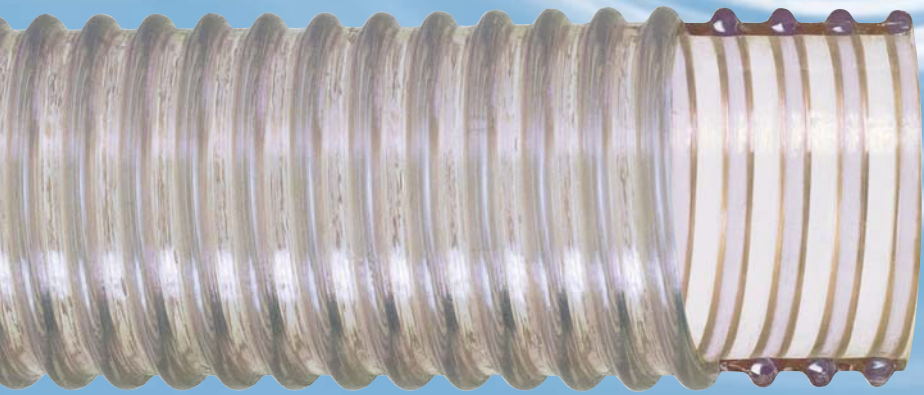

SPIRALITE® 145

PVC ALL-CLEAR FDA CORRUGATED SUCTION HOSE

NOMINAL SIZE	inch	1"	1 1/4"	1 1/2"	45mm	2"	57mm	2 1/2"	3"	4"
APPROX. O.D.	inch	1.26	1.61	1.82	2.13	2.44	2.67	2.98	3.54	4.65
RECOMMENDED W.P. AT 68°F	psi	35	50	50	40	40	40	40	35	35
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	3	3	4	4	4	5	6	8
APPROX. B.P. AT 68°F	psi	105	150	150	120	120	120	120	105	105
APPROX. WT.	lbs./ft.	.14	.31	.37	.51	.57	.64	.77	1.04	1.65

* BEND RADIUS FOR CONTINUOUS SERVICE.

- **APPEARANCE/CONSTRUCTION:**
Clear PVC wall and helix.
Corrugated cover, smooth interior.
- **BENEFITS:**
 - Non-toxic formula conforms with FDA requirements.
 - Smooth interior prevents material blockage.
 - Clear construction allows easy material inspection.
- **GENERAL APPLICATIONS:**
 - Food processing/handling.
 - USDA meat and poultry plants.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**

1" thru 4"	100ft.
------------	--------




SPIRALITE® 150

PVC OIL RESISTANT SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Orange PVC with white helix.
Smooth wall and interior.
- **BENEFITS:**
 - Specially compounded from oil-resistant PVC.
 - Excellent alternative to more expensive rubber hoses.
- **GENERAL APPLICATIONS:**
 - General suction for light oils and animal fats.
 - Good for use in environments where hose may be exposed to oils.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
1" thru 6" 100ft.

NOMINAL SIZE	inch	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"
APPROX. O.D.	inch	1.29	1.57	1.87	2.44	2.78	3.54	4.65	5.65	6.80
RECOMMENDED W.P. AT 68°F	psi	120	90	90	85	75	75	70	55	50
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3	4	5	7	10	12	16	21	24
APPROX. WT.	lbs./ft.	.31	.43	.57	.87	1.19	1.62	2.56	3.15	4.64

* BEND RADIUS FOR CONTINUOUS SERVICE.

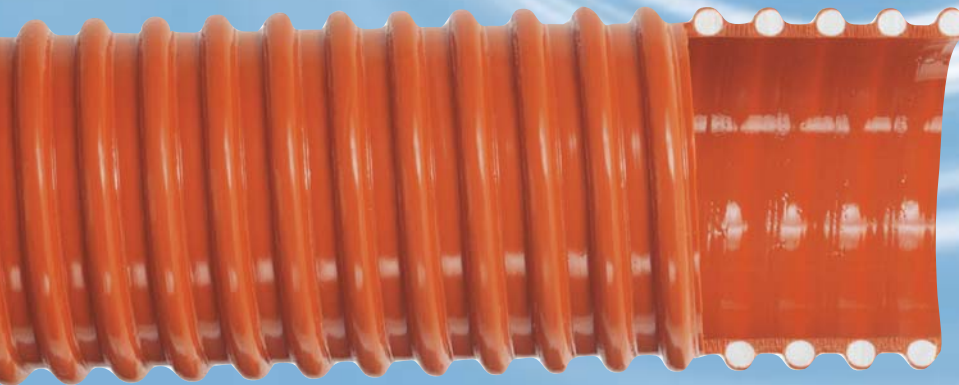

SPIRALITE® 160

PVC OIL RESISTANT CORRUGATED SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Orange PVC with white helix.
Corrugated wall, smooth interior.
- **BENEFITS:**
 - Specially compounded from oil-resistant PVC.
 - Excellent alternative to more expensive rubber hoses.
- **GENERAL APPLICATIONS:**
 - General suction for light oils and animal fats.
 - Good for use in environments where hose may be exposed to oils.
 - Vapor recovery.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
1-1/2" thru 4" 100ft.

NOMINAL SIZE	inch	1 1/2"	2"	2 1/2"	3"	4"
APPROX. O.D.	inch	1.86	2.44	2.98	3.54	4.65
RECOMMENDED W.P. AT 68°F	psi	50	40	35	35	35
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3	4	5	6	8
APPROX. WT.	lbs./ft.	.39	.60	.81	1.10	1.73

* BEND RADIUS FOR CONTINUOUS SERVICE.




SPIRALITE® 170

PVC CLEAR FDA SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Clear PVC with white helix.
Smooth wall and interior.
- **BENEFITS:**
 - Non-toxic formula conforms with FDA requirements.
 - Smooth interior prevents materials blockage.
 - Conforms to USDA 3A standards for milk hauling.
 - USDA approved for meat and poultry plants.
- **GENERAL APPLICATIONS:**
 - Food processing/handling.
 - Service in dairies and wineries.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
3/4" thru 6" 100ft.
8" and above 20' 25' 30'

NOMINAL SIZE	inch	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
APPROX. O.D.	inch	1.01	1.27	1.53	1.82	2.36	2.90	3.44	4.52	5.65	6.80	8.95	11.34	13.39
RECOMMENDED W.P. AT 68°F	psi	100	90	90	90	70	65	55	50	45	45	40	40	35
W.P. AT 140°F	max psi	42	42	42	42	37	32	28	28	-	-	-	-	-
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28	28	28	28	26
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	3	4	5	6	8	9	13	21	24	35	41	53
APPROX. B.P. AT 68°F	psi	300	270	270	270	210	195	165	150	135	135	120	120	105
APPROX. WT.	lbs./ft.	.20	.27	.34	.47	.66	.92	1.25	1.87	3.00	4.42	6.81	12.10	15.30

* BEND RADIUS FOR CONTINUOUS SERVICE.

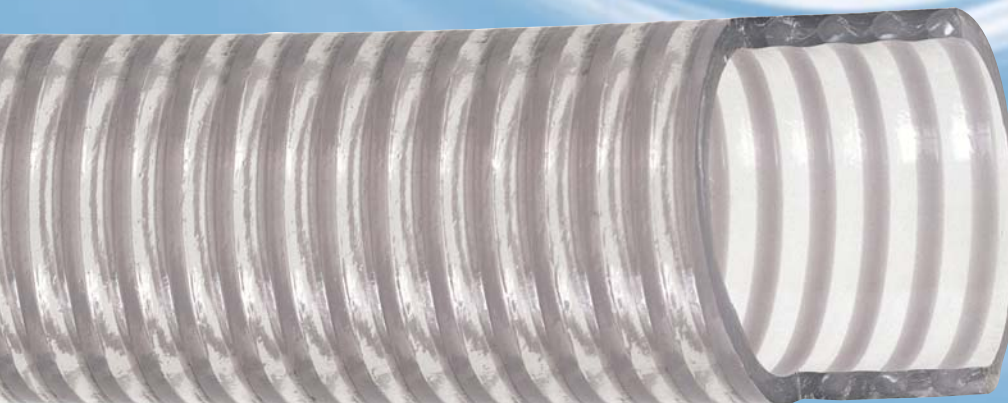

SPIRALITE® 175

PVC ALL-CLEAR FDA SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Clear PVC wall and helix.
Smooth wall and interior.
- **BENEFITS:**
 - Non-toxic formula conforms with FDA requirements.
 - Smooth interior prevents material blockage.
 - Clear construction allows easy material inspection.
 - Conforms to USDA 3A standards for milk hauling.
 - USDA approved for meat and poultry plants.
- **GENERAL APPLICATIONS:**
 - Food processing/handling.
 - Service in dairies and wineries.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
3/4" thru 4" 100ft.

NOMINAL SIZE	inch	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
APPROX. O.D.	inch	1.02	1.29	1.56	1.84	2.39	2.92	3.46	4.56
RECOMMENDED W.P. AT 68°F	psi	100	100	90	90	70	65	60	50
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	3	4	5	6	8	9	13
APPROX. B.P. AT 68°F	psi	300	300	270	270	210	195	180	150
APPROX. WT.	lbs./ft.	.21	.30	.38	.48	.71	.97	1.27	2.01

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® 190

PVC CLEAR CORRUGATED LIGHT DUCT HOSE

- **APPEARANCE/CONSTRUCTION:**
Clear PVC wall with white helix. Corrugated wall, and smooth interior.
- **BENEFITS:**
 - Lightweight and highly flexible.
- **GENERAL APPLICATIONS:**
 - Air ducting and dust control.
 - Transferring light abrasives.
 - Also available in Flame Resistant (UL 94V0 & USMSHA 2G-26/1) formulations on special orders.

NOMINAL SIZE	inch	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"
APPROX. O.D.	inch	1.25	1.52	1.79	2.35	2.90	3.45	4.50	5.54	6.54	8.57	10.61
RECOM. MIN. BEND RADIUS AT 68°F*	inch	1	2	2	2	3	3	4	5	5	7	13
APPROX. WT.	lbs./ft.	.15	.20	.24	.39	.54	.72	1.02	1.26	1.51	2.21	2.75

- **STANDARD LENGTHS:**

1" thru 6"	100ft.
8"	50ft.
10"	25ft.



SPIRALITE® 191

PVC BLACK LEAF AND GRASS COLLECTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Black PVC wall with white helix. Corrugated wall, smooth interior.
- **BENEFITS:**
 - Lightweight and highly flexible.
 - Also available in Clear.
- **GENERAL APPLICATIONS:**
 - Lawn vacuums.
 - Ducting light abrasives.
- **TEMPERATURE RANGE:**
-10°F to +130°F

NOMINAL SIZE	inch	4"	5"	6"	7"	8"	10"
APPROX. O.D.	inch	4.52	5.54	6.54	7.55	8.57	10.61
RECOM. MIN. BEND RADIUS AT 68°F*	inch	4	5	5	5	7	13
APPROX. WT.	lbs./ft.	1.02	1.26	1.3	1.74	2.19	2.73

* BEND RADIUS FOR CONTINUOUS SERVICE.

- **STANDARD LENGTHS:**

4" thru 6"	100ft.
7" & 8"	50ft.
10"	25ft.



SPIRALITE® 195

PVC CLEAR HEAVY DUCT HOSE

- **APPEARANCE/CONSTRUCTION:**
Clear PVC with white helix.
- **BENEFITS:**
 - Lightweight but capable of light suction duties.
- **GENERAL APPLICATIONS:**
 - Air and light abrasive ducting.
 - Light dredge suction.
 - Also available in Low-Temperature version (194).
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**

1-1/2" thru 6"	100ft.
7" and 8"	50ft.
10" and 12"	25ft.

NOMINAL SIZE	inch	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	7"	8"	10"	12"
APPROX. O.D.	inch	1.83	2.40	2.91	3.54	4.56	5.63	6.82	7.90	8.91	11.18	13.15
RECOMMENDED W.P. AT 68°F	psi	40	35	25	25	25	25	25	20	20	20	20
VACUUM RATING AT 68°F	in/HG	28	28	26	28	28	20	20	20	16	16	16
BEND RADIUS AT 68°F*	inch	3	4	5	6	8	10	12	15	18	23	29
APPROX. B.P. AT 68°F	psi	120	100	75	75	75	75	75	60	60	60	60
APPROX. WT.	lbs./ft.	.32	.48	.60	.86	1.29	1.93	3.04	3.80	4.32	7.47	8.87

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® 310

PVC YELLOW 570 PSI SPRAY HOSE

- **APPEARANCE/CONSTRUCTION:**
Yellow PVC ribbed cover, smooth tube. Woven fabric reinforcement.
- **BENEFITS:**
 - Best combination of flexibility, durability and value.
- **GENERAL APPLICATIONS:**
 - Agricultural spraying.
 - Pest control.
 - Transferring compressed water and air.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**

300ft.
1/2" also available in 400ft.

NOMINAL SIZE	inch	1/4" x 1B	3/8" x 1B	1/2" x 1B	5/8" x 1B	3/4" x 1B
INSIDE DIAMETER	inch	19/64	25/64	33/64	40/64	3/4
OUTSIDE DIAMETER	inch	17/32	43/64	13/16	31/32	1-5/64
MAX. WORKING PRESSURE AT 70°F	psi	570	570	570	570	570
DESIGN BURST PRESSURE AT 70°F	psi	1,710	1,710	1,710	1,710	1,710
APPROX. WT.	lbs./300'	24	35	47	64	80

SPIRALITE 320 3/4" 560PSI



NOMINAL SIZE	inch	3/8" x 4SP	1/2" x 4SP	3/4" x 4SP
INSIDE DIAMETER	inch	25/64	33/64	3/4
OUTSIDE DIAMETER	inch	43/64	13/16	1-5/64
MAX. WORKING PRESSURE AT 70°F	psi	560	560	560
DESIGN BURST PRESSURE AT 70°F	psi	1,710	1,710	1,710
APPROX. WT.	lbs./300'	36	48	80

SPIRALITE® 320

PVC ORANGE
560 PSI SPRAY HOSE

- **APPEARANCE/CONSTRUCTION:**
Orange PVC ribbed cover, smooth tube. Spiral yarn reinforcement.
- **BENEFITS:**
– Durable and flexible.
- **GENERAL APPLICATIONS:**
– Agricultural spraying.
– Pest control.
– Transferring compressed water and air.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
300ft.
3/8" and 1/2" also available in 400ft.

SPIRALITE 340 800PSI WP



NOMINAL SIZE	inch	3/8" x 1B	1/2" x 1B	3/4" x 1B	1" x 1B
INSIDE DIAMETER	inch	25/64	33/64	3/4	1
OUTSIDE DIAMETER	inch	22/32	27/32	1-9/64	1-15/32
MAX. WORKING PRESSURE AT 70°F	psi	800	800	800	800
DESIGN BURST PRESSURE AT 70°F	psi	3,700	3,500	2,700	2,460
APPROX. WT.	lbs./300'	41	54	91	135

SPIRALITE® 340

PVC GREEN
800 PSI SPRAY HOSE

- **APPEARANCE/CONSTRUCTION:**
Green PVC ribbed cover, smooth tube. Woven fabric reinforcement.
- **BENEFITS:**
– High working pressure in a light weight, flexible package.
- **GENERAL APPLICATIONS:**
– Agricultural spraying.
– Pest control.
– Transferring compressed water and air.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
300ft.

SPIRALITE® 410

PVC CLEAR BRAIDED HOSE

- **APPEARANCE/CONSTRUCTION:**
Clear PVC tube with braided reinforcement.
- **BENEFITS:**
– Non-toxic FDA formula.
- **GENERAL APPLICATIONS:**
– Transferring compressed liquids and air.
– Food processing.
– Approved for use in USDA meat and poultry plants.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
1/4" thru 3/4" 300ft.
1" thru 2" 100ft.

NOMINAL SIZE	inch	1/4" x 1B	3/8" x 1B	1/2" x 1B	5/8" x 1B	3/4" x 1B	1" x 1B	1 1/4" x 1B	1 1/2" x 1B	2" x 1B
INSIDE DIAMETER	inch	33/128	49/128	33/64	81/128	49/64	1	1 1/4	1 1/2	2
OUTSIDE DIAMETER	inch	15/32	5/8	3/4	7/8	1-1/32	1-5/16	1-3/4	2	2-1/2
MAX. WORKING PRESSURE AT 70°F	psi	250	200	200	200	150	125	100	75	75
DESIGN BURST PRESSURE AT 70°F	psi	1000	800	800	800	600	500	400	300	300
APPROX. WT.	lbs./Roll	19.5	32	38	45	61	32	63	74	95



SPIRALITE® 510

PVC CLEAR TUBING

I.D.	O.D.	WALL THICKNESS	MAXIMUM W.P. AT 68°F	APPROX. WT. LBS/ROLL
1/8"	1/4"	1/16"	70	2.65
3/16"	5/16"	1/16"	70	3.07
1/4"	3/8"	1/16"	60	3.4
1/4"	7/16"	3/32"	60	5.38
1/4"	1/2"	1/8"	70	8.37
5/16"	7/16"	1/16"	50	4.63
5/16"	1/2"	3/32"	60	7.16
3/8"	1/2"	1/16"	50	5.58
3/8"	9/16"	3/32"	55	8.18
3/8"	5/8"	1/8"	60	11.55

I.D.	O.D.	WALL THICKNESS	MAXIMUM W.P. AT 68°F	APPROX. WT. LBS/ROLL
1/2"	5/8"	1/16"	40	7.39
1/2"	3/4"	1/8"	50	13.14
9/16"	7/8"	5/32"	45	18.73
5/8"	7/8"	1/8"	45	15.81
3/4"	1"	1/8"	35	18.6
7/8"	1-1/8"	1/8"	35	21.1
1"	1-1/4"	1/8"	30	23.8
1-1/4"	1-3/4"	1/4"	50	33.6
1-1/2"	2"	1/4"	40	42.9
2"	2-3/8"	3/16"	25	38.2

• **APPEARANCE/CONSTRUCTION:**

Clear PVC tube.

• **BENEFITS:**

- Non-toxic FDA formula.
- Colored tubing available with minimum orders.

• **GENERAL APPLICATIONS:**

- Water and light chemical transfer.
- Approved for use in USDA meat and poultry plants.

• **TEMPERATURE RANGE:**

-10°F to +130°F

• **STANDARD LENGTHS:**

1/8" thru 1" 100ft.
1-1/4" thru 2" 50ft.



SPIRALITE® 850

"PAC-FLEX" PVC GRAY FLEXIBLE HOSE

• **APPEARANCE/CONSTRUCTION:**

Gray tube with white helix. Smooth cover and interior.

• **BENEFITS:**

- Manufactured to schedule 40 sizing specifications.
- Glues into standard PVC fittings.
- Meets or exceeds Western Underground Committee's 3.1 Specification, 3.2 Heat Distortion, 3.3 Impact Resistance, and 3.4 Conduit Stiffness.

• **GENERAL APPLICATIONS:**

- Cable conduit.
- Plumbing drain (no pressure) lines.

• **TEMPERATURE RANGE:**

-10°F to +130°F

• **STANDARD LENGTHS:**

1/2" thru 6" 100ft.

NOMINAL SIZE	inch	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
APPROX. O.D.	inch	.85	1.06	1.33	1.67	1.91	2.38	2.89	3.50	4.50	6.61
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	2	3	4	5	6	7	8	11	16
APPROX. WT.	lbs./ft.	.15	.23	.32	.40	.50	.70	.95	1.28	1.93	4.42

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® 960

URETHANE BLENDED DUCT HOSE

- **APPEARANCE/CONSTRUCTION:**

PVC/Polyurethane blended tube with PVC helix.
Corrugated exterior with smooth interior.

- **BENEFITS:**

- Polyurethane blended wall for added abrasion resistance.
- Improved wall design enhances flexibility.
- PVC reinforcement resist crushing.
- Extremely flexible.

- **GENERAL APPLICATIONS:**

- Tight bend areas with light abrasive material transfer.
- Blown insulation applications.
- Ice slinger hose.

- **TEMPERATURE RANGE:**

-10°F to +130°F

- **STANDARD LENGTHS:**

3" thru 6" 100ft.

NOMINAL SIZE	inch	3"	4"	5"	6"
APPROX. O.D.	inch	3.50	4.57	5.57	6.60
RECOMMENDED W.P. AT 68°F	psi	10	10	10	7
RECOM. MIN. BEND RADIUS AT 68°F*	inch	4	6	6	7
APPROX. B.P. AT 68°F	psi	35	35	30	25
APPROX. WT.	lbs./ft	.86	1.09	1.38	1.69

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® 1000

RUBBER STANDARD SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Rubber tube with black PVC helix. Smooth cover and interior.
- **BENEFITS:**
 - Good blend of durability, handling weight and flexibility.
 - Static-dissipating tube.
- **GENERAL APPLICATIONS:**
 - Material Handling.
 - Water/light chemical suction and transfer.
 - Transferring moderate abrasives.
- **TEMPERATURE RANGE:**
-30°F to +140°F
- **STANDARD LENGTHS:**
1-1/2" thru 6" 100ft.

NOMINAL SIZE	inch	1 1/2"	2"	2 1/2"	3"	4"	6"
APPROX. O.D.	inch	1.92	2.43	2.92	3.53	4.65	6.76
RECOMMENDED W.P. AT 68°F	psi	70	60	45	45	45	30
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	13
RECOM. MIN. BEND RADIUS AT 68°F*	inch	5	6	8	9	12	20
APPROX. B.P. AT 68°F	psi	210	180	135	135	135	90
APPROX. WT.	lbs./ft.	.60	.80	1.07	1.45	2.30	3.98

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® 1100

CORRUGATED RUBBER SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Rubber tube with black PVC helix. Corrugated cover, smooth interior.
- **BENEFITS:**
 - Good blend of durability, handling weight and flexibility.
 - Static-dissipating tube.
- **GENERAL APPLICATIONS:**
 - Material handling.
 - Water/light chemical suction and transfer.
 - Transferring moderate abrasives.
- **TEMPERATURE RANGE:**
-30°F to +140°F
- **STANDARD LENGTHS:**
1-1/2" thru 6" 100ft.
8" 50ft.

NOMINAL SIZE	inch	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	5"	6"	8"
APPROX. O.D.	inch	1.88	2.41	2.98	3.54	4.04	4.65	5.77	6.86	9.10
RECOMMENDED W.P. AT 68°F	psi	50	40	35	35	30	30	30	25	25
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3	4	5	6	8	8	9	12	16
APPROX. B.P. AT 68°F	psi	150	120	105	105	90	90	90	75	75
APPROX. WT.	lbs./ft.	.38	.54	.77	1.05	1.25	1.68	2.40	3.18	5.73

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® 1200

CORRUGATED RUBBER DUCT HOSE

NOMINAL SIZE	inch	2"	2 1/2"	3"	4"	5"	6"	8"
APPROX. O.D.	inch	2.37	2.91	3.48	4.55	5.65	6.78	8.87
RECOMMENDED W.P. AT 68°F	psi	35	30	30	25	25	25	20
VACUUM RATING AT 68°F	in/HG	28	28	28	25	25	25	25
RECOM. MIN. BEND RADIUS AT 68°F*	inch	4	5	6	9	10	12	17
APPROX. B.P. AT 68°F	psi	105	90	90	75	75	75	60
APPROX. WT.	lbs./ft.	.49	.66	.91	1.36	2.08	2.86	4.23

* BEND RADIUS FOR CONTINUOUS SERVICE.

- **APPEARANCE/CONSTRUCTION:**
Rubber tube with black PVC helix. Corrugated cover, smooth interior.
- **BENEFITS:**
 - Lightweight and durable.
 - Static-dissipating tube.
- **GENERAL APPLICATIONS:**
 - Material handling.
 - Air, abrasive dust ducting.
 - Light abrasive suction.
- **TEMPERATURE RANGE:**
-30°F to +140°F
- **STANDARD LENGTHS:**

2" thru 6"	100ft.
8"	50ft.



SPIRALITE® 2000

EPDM RUBBER SUCTION HOSE

NOMINAL SIZE	inch	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
APPROX. O.D.	inch	1.34	1.61	1.96	2.49	3.00	3.60	4.69	6.86
RECOMMENDED W.P. AT 68°F	psi	80	70	60	60	50	50	45	35
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	20
RECOM. MIN. BEND RADIUS AT 68°F*	inch	4	5	6	9	11	12	17	27
APPROX. B.P. AT 68°F	psi	240	210	180	180	150	150	135	105
APPROX. WT.	lbs./ft.	.23	.30	.49	.69	.91	1.03	1.81	3.84

* BEND RADIUS FOR CONTINUOUS SERVICE.


- **APPEARANCE/CONSTRUCTION:**
Black EPDM rubber tube with natural poly-ethylene helix. Corrugated wall, smooth interior.
- **BENEFITS:**
 - Excellent flexibility and durability.
 - Good chemical resistance (see chemical resistance chart).
- **GENERAL APPLICATIONS:**
 - Transferring light chemical and fertilizer solutions.
 - Septic service.
 - Transferring light abrasives.
- **TEMPERATURE RANGE:**
-30°F to +140°F
- **STANDARD LENGTHS:**

1" thru 6"	100ft.
------------	--------



NOMINAL SIZE	inch	1 1/2"	2"	2 1/2"	3"	4"	6"
APPROX. O.D.	inch	1.83	2.42	3.00	3.59	4.68	6.88
RECOMMENDED W.P. AT 68°F	psi	33	27	25	24	22	20
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3	4	5	6	7	10
APPROX. B.P. AT 68°F	psi	100	80	75	72	66	60
APPROX. WT.	lbs./ft.	.30	.45	.65	.89	1.27	2.43

* BEND RADIUS FOR CONTINUOUS SERVICE.

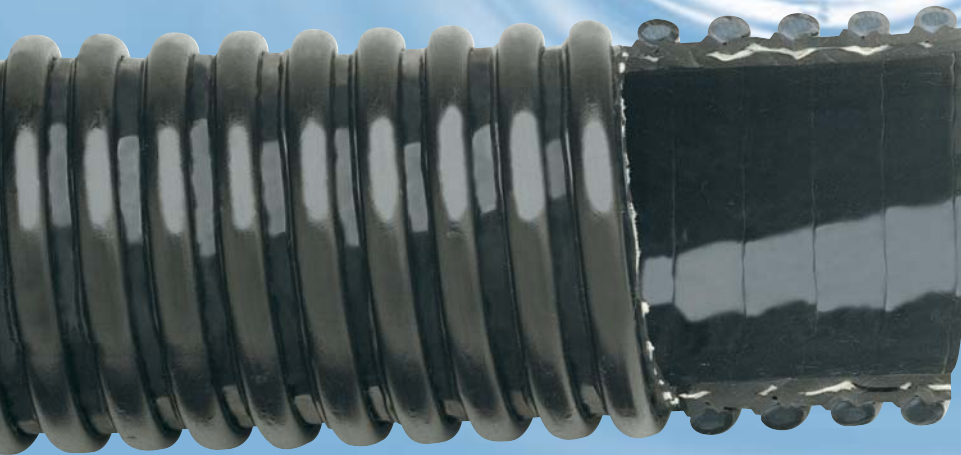

NOMINAL SIZE	inch	2"	3"	4"
APPROX. O.D.	inch	2.66	3.86	4.87
RECOMMENDED W.P. AT 68°F	psi	100	85	70
VACUUM RATING AT 68°F	in/HG	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F	inch	4	6	8
APPROX. B.P. AT 65°F	psi	310	260	210
APPROX. WT.	lbs./ft.	.88	1.61	2.30

SPIRALITE® 2400


EPDM RUBBER DUCT HOSE

- **APPEARANCE/CONSTRUCTION:**
Black EPDM rubber tube with natural poly-ethylene helix.
Corrugated wall, smooth interior.
- **BENEFITS:**
 - Excellent flexibility and durability.
 - Good chemical resistance (see chemical resistance chart).
- **GENERAL APPLICATIONS:**
 - Air and corrosive atmosphere.
 - Water/light chemical suction and transfer.
- **TEMPERATURE RANGE:**
-30°F to +140°F
- **STANDARD LENGTHS:**
1-1/2" thru 6" 100ft.

SPIRALITE® 2700

BRAIDED EPDM RUBBER SUCTION / DISCHARGE HOSE

- **APPEARANCE/CONSTRUCTION:**
Black EPDM rubber tube and wall with polyester braid reinforcement; black poly-ethylene helix.
Corrugated wall, smooth interior.
- **BENEFITS:**
 - Excellent flexibility and durability.
 - Higher working pressure than standard EPDM.
 - Good chemical resistance (see chemical resistance chart).
- **GENERAL APPLICATIONS:**
 - Suction / Discharge service for industry and agriculture.
 - Applications requiring the chemical resistance of EPDM rubber at higher working pressures.
- **TEMPERATURE RANGE:**
-30°F to +140°F
- **STANDARD LENGTHS:**
2" thru 4" 100ft.

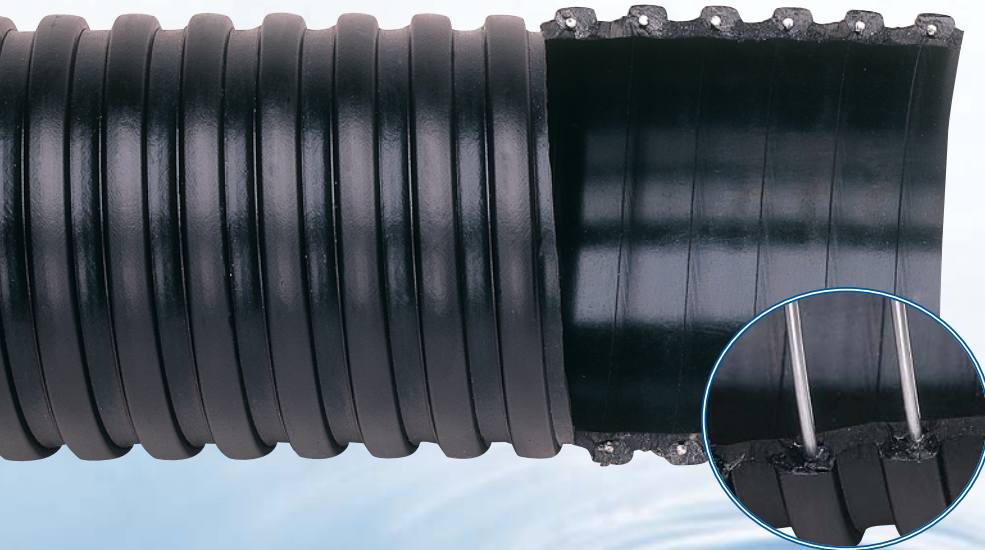

SPIRALITE® 2800

EPDM RUBBER HOSE POLY-ETHYLENE/SOLID WIRE HELIX

• APPEARANCE/CONSTRUCTION:

EPDM rubber tube with integrated solid wire with a poly-ethylene helix.
Corrugated exterior, smooth interior wall.

• BENEFITS:

- Wire helix resist deformation at higher temperatures.
- Good flexibility in higher temperature suction application.
- PVC reinforcement resist crushing.
- Polyethylene helix reduces drag.

• GENERAL APPLICATIONS:

- Suction application in higher temperature conditions.
- Fly ash suction applications.
- Vacuum trucks.

• TEMPERATURE RANGE:

-30°F to +220°F

• STANDARD LENGTHS:

3" thru 6" 100ft.
8" 25ft.

NOMINAL SIZE	inch	3"	4"	5"	6"	8"
APPROX. O.D.	inch	3.57	4.69	5.81	6.82	8.56
RECOMMENDED W.P. AT 68°F	psi	30	29	28	28	25
RECOM. MIN. BEND RADIUS AT 68°F	inch	6	6	10	10	15
APPROX. B.P. AT 68°F	psi	100	90	85	85	75
APPROX. WT.	lbs./ft	1.45	2.20	3.25	3.91	5.20



SPIRALITE® 4000

NBR RUBBER OIL AND GREASE SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Black NBR-blended rubber tube with white PVC helix.
Corrugated wall, smooth interior.
- **BENEFITS:**
 - Excellent oil resistance.
 - Lightweight and flexible.
- **GENERAL APPLICATIONS:**
 - Grease trap cleaning.
 - Oil suction and transfer.
- **TEMPERATURE RANGE:**
-30°F to +140°F
- **STANDARD LENGTHS:**
2" thru 4" 100ft.

NOMINAL SIZE	inch	2"	2.5"	3"	4"
APPROX. O.D.	inch	2.53	3.12	3.69	4.77
RECOMMENDED W.P. AT 68F	psi	60	50	50	45
VACUUM RATING AT 68F	in/HG	28	28	28	28
BEND RADIUS AT 68F	inch	9	11	12	17
APPROX. B.P. AT 68FS	psi	180	150	150	135
APPROX. WT.	lbs./ft	.87	1.02	1.61	2.30



SPIRALITE® 5000

PETROLEUM TANK DROP HOSE WITH STATIC WIRE


- This hose is engineered with a NBR tube & cover for the pressure, gravity flow or suction movement of gasoline and petroleum base products with an aromatic content not to exceed 50%.
- Spiralite 5000 is compounded especially to remain flexible to temperature readings of -30°F.
- Standard hose includes static conductive tube and copper static wire.
- Spiralite 5000 is manufactured to offer
 - Extra Durability and abrasion resistance.
 - High resistance to gasoline and natural elements such as ozone weather cracking.
 - Lightweight for ease of handling.
- See Banding Sleeve 5500 for drop hose
- See W187 for vapor recovery hose.



ID	OD	WP @ 72°F	BURST @ 72°F	BEND. RADIUS"	WEIGHT/FT.
2"	2.66	100	400	4	.87
2-1/2"	3.19	100	360	5	1.13
3"	3.76"	65	260	6	1.71
4"	4.79"	65	260	8	2.44

CONSTRUCTION: Tube-Black Synthetic Rubber
Reinforcement - Polyester and Static Wire
Cover - Yellow PVC Helix
Banding Sleeve - Black PVC

LENGTH: Spiralite 5000 Drop Hose —100'

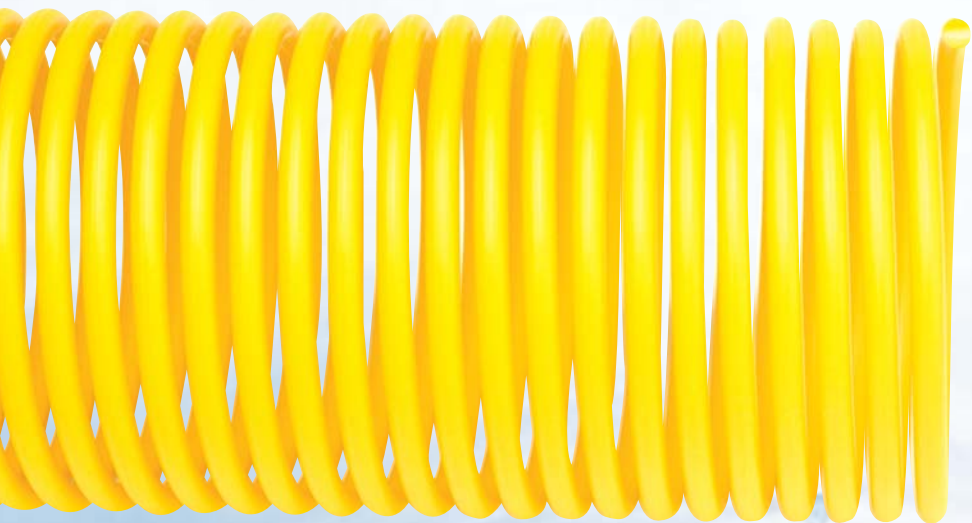

SPIRALITE® 5200

SPRING SLEEVE

- Yellow PVC.
- Winds into valleys between helix.
- Provides smooth banding surface.

- **AVAILABLE SIZES:**

1-1/2", 2", 2-3/8", 3", and 4"

- **STANDARD LENGTH:**

3ft.



SPIRALITE® 5500

BLACK BANDING SLEEVE FOR TANK DROP HOSE

- Soft Black PVC.
- Designed to fit Spiralite 5000.
- Provides smooth banding surface.

- **AVAILABLE SIZES:**

3" and 4"

- **STANDARD LENGTH:**

3ft.



SPIRALITE® 5600

GRAY BANDING SLEEVE FOR VAPOR RECOVERY HOSE


- Soft Gray PVC.
- Designed to fit Spiralite W187.
- Provides smooth banding surface.

- **AVAILABLE SIZES:**

3" and 4"

- **STANDARD LENGTH:**

3ft.

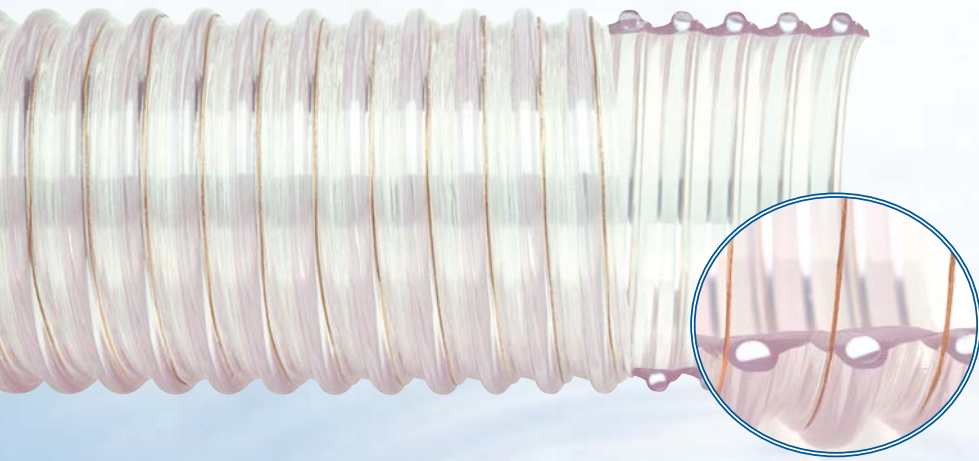

SPIRALITE® W145

ALL-CLEAR PVC CORRUGATED FOOD GRADE SUCTION HOSE WITH STATIC WIRE


- **APPEARANCE/CONSTRUCTION:**
Clear PVC tube and helix.
Corrugated wall, smooth interior.
Static-conductive wire.
- **BENEFITS:**
 - Lightweight and highly flexible.
 - Non-toxic PVC conforms to FDA standards.
 - All clear construction allows easy material inspection.
- **GENERAL APPLICATIONS:**
 - Pneumatic conveying powder, pellets and granular materials.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
1-1/4" thru 6" 100ft.

NOMINAL SIZE	inch	1-1/4"	1-1/2"	45mm	2"	57mm	2-1/2"	3"	4"	5"	6"
APPROX. O.D.	inch	1.61"	1.82	2.13	2.37	2.67	3.01	3.05	4.54	5.73	6.98
RECOMMENDED W.P. AT 68°F	psi	50	50	40	40	40	40	35	35	30	35
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	24	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3	3	4	4	4	5	6	8	11	15
APPROX. B.P. AT 68°F	psi	100	100	120	120	120	120	105	105	90	105
APPROX. WT.	lbs./ft.	.32	.38	.51	.58	.64	.79	1.06	1.68	2.34	4.13

** ** *

* BEND RADIUS FOR CONTINUOUS SERVICE.

** 5" AND 6" WILL HAVE WHITE HELIX

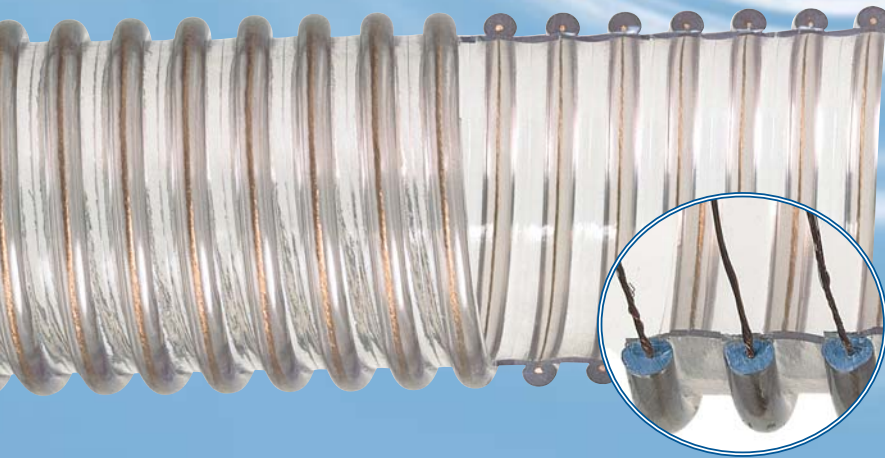

SPIRALITE® W185

ALL-CLEAR PVC CORRUGATED FOOD GRADE DUCT HOSE WITH STATIC WIRE

- **APPEARANCE/CONSTRUCTION:**
Clear PVC tube and helix.
Corrugated wall, smooth interior.
Static-conductive wire.
- **BENEFITS:**
 - Lightweight and highly flexible.
 - Non-toxic PVC conforms to FDA standards.
 - All clear construction allows easy material inspection.
- **GENERAL APPLICATIONS:**
 - Low-volume conveying of powder and pellets.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
1-1/2" thru 6" 100ft.

NOMINAL SIZE	inch	1 1/2"	39mm	45mm	2"	57mm	2 1/2"	3"	4"	5"	6"
APPROX. O.D.	inch	1.87	1.91	2.20	2.44	2.69	2.98	3.53	4.58	5.62	6.67
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	2	2	2	3	3	3	4	4	5
APPROX. WT.	lbs./ft.	.36	.36	.45	.58	.53	.61	.85	1.13	1.55	1.88

* BEND RADIUS FOR CONTINUOUS SERVICE.



SPIRALITE® W187

CORRUGATED POLYURETHANE VAPOR RECOVERY HOSE WITH STATIC WIRE

NOMINAL SIZE	inch	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"
APPROX. O.D.	inch	1.88	2.43	2.96	3.54	4.56	5.51	6.52	8.75
RECOM. MIN. BEND RADIUS AT 68°F*	inch	1.5	2	2.5	3	4	5	6	10
APPROX. WT.	lbs./ft.	.36	.48	.61	.69	.92	1.13	1.24	2.42

* BEND RADIUS FOR CONTINUOUS SERVICE.

- **APPEARANCE/CONSTRUCTION:**

Clear Polyurethane tube with Yellow PVC helix and static wire.

- **BENEFITS:**

- Lightweight and highly flexible.
- Resistant to chemical vapors and light abrasives.
- Static conductive wire.

- **GENERAL APPLICATIONS:**

- Vapor recovery for use with Spiralite 5000.
- Ducting dust and light abrasives.

- **TEMPERATURE RANGE:**

-30°F to +140°F

- **STANDARD LENGTHS:**

1-1/2" thru 6" 100ft.
8" 50ft.

- **See 5600 for Vapor Recovery Banding Sleeve**

SPIRALITE® 3000

SPIRAL DOUBLE BOLT CLAMP



- Cadmium plated steel.
- Specially designed to fit Spiralite corrugated hoses.
- Prevent leaks.

• **AVAILABLE SIZES:**

1-1/2", 2", 2-1/2", 3", 4", 5", 6",
8", 10", and 12"

Also available in pipe-sizes:

2-3/8", 3-1/2", 4-1/2", 6-5/8", and 8-5/8"

TERMS OF SALE

TERMS: Net 30 days, unless otherwise specified by our Credit Department.

FREIGHT: All shipments F.O.B. point of shipment unless otherwise noted by Pacific Echo Inc.

RETURNED GOODS: Returned goods must have prior approval of Pacific Echo, Inc. Only standard shipping lengths will be accepted for return. Goods must be returned freight prepaid and a restocking charge will be required. Shipments without our consent will be refused.

CLAIMS: No claims will be allowed unless reported within 5 days after receipt of merchandise.

WARRANTY: Pacific Echo, Inc. guarantees all manufactured goods to be free from defects due to workmanship and materials. Credit or replacement is subject to determination of product failure due to manufacturing or material defects. Compensation is limited to the value of merchandise sold or replaced.

FORCE MAJEURE: Seller shall not be liable for failure to perform or for delay in performance due to Acts of God, flood, fire; Acts of War, government authority, riots, explosions, embargo; Labor difficulty, strikes, breakdown of machinery or equipment, accidents; Shortage or inability to obtain raw materials, equipment, fuel, power, transportation; Acts or omission of the Buyer; Any cause beyond Seller's reasonable control.

CAUTION: **YOU MUST OBTAIN WRITTEN CONSENT BEFORE USING OUR PRODUCTS WITH MATERIALS CONSIDERED POTENTIALLY HAZARDOUS BY THE MATERIAL MANUFACTURER'S MATERIAL SAFETY DATA SHEET RATING.**

EPDM CHEMICAL RESISTANCE CHART

A=SATISFACTORY

B=BE EXPECTED TO CHANGE

C=UNSATISFACTORY

Chemical	Resistance Rating at 68°F	Chemical	Resistance Rating at 68°F
Acetone	A	Hexanol	B
Ammonia	A	Hydrochloric Acid	A
Ammonia Solution	A	Hydrogen Sulfide	C
Ammonium Carbonate	A	Iron Ore	B
Amyl Acetate	B	Iso-Octane	C
Amyl Alcohol	A	Iso-Propyl Alcohol	A
Animal Oil	B	Latex	C
ASTM No. 1-3 Oil	C	Magnesium Chloride	A
Benzene	C	Magnetite Sand	A
Butane	C	Methane	C
Butyl Alcohol	B	Methanol	A
Butyl Acetate	B	Methyl Acetate	B
Butylene Calcium Hydroxide	A	Naptha	C
Carbonic Acid Gas	B	Nierus Acid	B
Carbonic Dioxide	A	Octyl Alcohol	A
Cement	A	Oxygene	A
Citric Acid	A	Phosphoric Acid	A
Coal Tar	C	Phosphoric Slurry	B
Cottonseed Oil	C	Potassium Hydroxide	A
Creasote	C	Potassium Phosphate	B
Crude Oil	C	Propane	C
Cyclo Hexane	B	Propyl Acetate	B
Diesel Oil	C	Propylene	C
Dilute Nitric Acid	C	Silicic Acid	C
Dilute-Sulphuric Acid 50%	B	Sodium Acetate	A
Ethyl Alcohol	A	Soybean Oil	C
Ethylene Glycol	A	Sodium Hydroxide	C
Farma Line	A	Steam	A
Fish Oil	C	Suffurous Acid Gas	A
Formic Acid	A	Toluene	C
Fuel Oil	C	Vegetable Oil	C
Gas	C	Wood Chip	B
Glycerol	A	Xylene	C
Glycol	A	Xylole	C
Grain	A	Zinc Acetate	A
		Zinc Sulfate	A

PROPERTIES OF SPIRALITE® 2000

O=EXCELLENT RESISTANCE


!=GOOD RESISTANCE

X=POOR RESISTANCE

Condition	2000 EPDM	Vinyl Suction	Conventional Rubber Suction
Weather Resistance	O	O	X
Aging Resistance	O	!	O
Property Under Low Temperature	!	X	O
Property Under High Temperature	!	!	O
Property of Helix Cracking	O	X	!
Electro Conductivity	O	X	!
Bending Habit	!	X	O
Oil Resistance	X	!	X
Acid Resistance	!	!	X
Alkali Resistance	O	!	O
Agricultural Chemical Resistance	O	!	X

BEND RADIUS DEFINITION

The radius to which a hose can be bent in service without damage or lowering its life which is measured to the inside of the curvature.

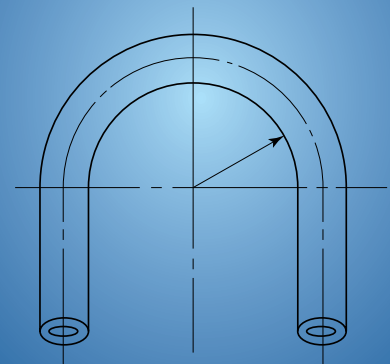

PVC CHEMICAL RESISTANCE CHART

A=SATISFACTORY B=BE EXPECTED TO CHANGE C=UNSATISFACTORY *-CHECK WITH FACTORY

NOTE: THIS PARTIAL LISTING IS FOR GENERAL GUIDANCE ONLY AND NO WARRANTY CAN BE EXTENDED AS EXACT OPERATING CONDITIONS MAY VARY IN EACH CASE. WE BASE THE INFORMATION ON PAST KNOWLEDGE AND EXPERIENCE.

Chemical	Concentration by Weight	Operating Conditions		Chemical	Concentration by Weight	Operating Conditions		Chemical	Concentration by Weight	Operating Conditions	
		68°F	140°F			68°F	140°F			68°F	140°F
Acetate Solvents		C	C	Cresylic Acid		C	C	Methyl Ethyl Ketone		C	C
Acetic Acid	10%	A	B	Cyclohexane		A	B	Methylene Chloride		C	C
Acetic Acid	Glacial	B	C	DDT Weed Killer		C	C	Mineral Oils		A	B
Acetone		C	C	Detergent Synthetic		A	B	Monochlorobenzene		C	C
Acrylonitrile		A	B	Developers Photographic		A	A	Naphtha		B	C
Adipic Acid		A	B	Dextrin		A	A	Naphthalene		C	C
Alcohol Methyl		A	B	Dextrose		A	A	Nitric Acid	10%	A	A
Alcohol Ethyl		A	B	Dibutyl Phthalate		C	C	Nitric Acid	40%	A	B
Alcohol Isopropyl		A	B	Dichlorobenzene		C	C	Nitric Acid	70%	C	C
Alcohol Methyl		A	B	Diesel Oil		B	C	Nitrobenzene		C	C
Aluminum Acetate		A	-	Diethylene Glycol		A	A	Nitrogen Fertilizers		A	-
Aluminum Chloride		A	A	Diethyl Ether		C	C	Oleic Acid		A	B
Aluminum Hydroxide		A	-	Dioctyl Phthalate		C	C	Oxalic Acid		A	A
Aluminum Sulfate		A	A	Emulsifiers		A	A	Palmitic Acid		A	A
Allyl Chloride		C	C	Emulsions Photographic		A	A	Paraffin		A	A
Ammonia	0.88S.G. Aqueous	A	A	Ethyl Acetate		C	C	Pentane		A	A
Ammonia	Dry Gas	A	-	Ethylene Dichloride		C	C	Perchloroethylene		C	C
Ammonia	Liquid	C	C	Ethylene Glycol		A	A	Phenol		B	C
Ammonium Chloride		A	A	Fatty Acid		A	A	Phosphoric Acid		A	A
Animal Oils		A	A	Ferric Chloride		A	A	Pitch		A	B
Amyl Acetate		C	C	Ferric Sulphate		A	A	Potassium Hydroxide		A	A
Aniline Oils		B	C	Ferrous Chloride		A	A	Propane		A	A
Aromatic Hydrocarbons		C	C	Ferrous Sulphate		A	A	Sea Water		A	A
Asphalt		C	C	Fixing Solution Photographic		A	A	Sodium Hydroxide	10%	C	C
ASTM Fuel A		B	B	Fluorine		C	C	Sodium Hydroxide	50%	C	C
ASTM Fuel B		C	C	Formaldehyde	40%	C	C	Sodium Cyanide		A	A
ASTM #1 Oil		A	A	Formic Acid	40%	A	A	Soybean Oil		A	B
ASTM #3 Oil		B	C	Formic Acid	50%	B	C	Stearic Acid		A	A
Barium Chloride		A	A	Formic Acid	100%	C	C	Styrene		C	C
Barium Hydroxide		A	A	Fuel Oil		B	C	Sulphur Dioxide	Dry	A	A
Barium Sulfide		A	A	Glacial Acetic Acid		B	C	Sulphur Dioxide	Moist	B	C
Benzene		C	C	Glucose		A	A	Sulphur Dioxide	Liquid	C	C
Benzine		B	B	Glycerine		A	A	Sulphuric Acid	45%	*	*
Bordaux Mixture		A	A	Grape Sugar		A	A	Sulphuric Acid	60%	*	*
Borax		A	A	Grease		A	B	Sulphuric Acid	98%	*	*
Boric Acid		A	A	Heptane		B	C	Sulphurous Acid	30%	*	*
Brine		A	A	Hexane		B	C	Tannic Acid		A	A
Bromine Traces		C	C	Hydrobromic Acid		C	C	Tartaric Acid		A	A
Butyl Acetate		C	C	Hydrochloric Acid	10%	C	C	Tetrahydrofuran		C	C
Calcium Hydroxide		A	A	Hydrochloric Acid	40%	C	C	Toluene		C	C
Calcium Hypochlorite		A	A	Hydrofluoric Acid	10%	C	C	Trichlorethylene		C	C
Carbonic Acid		B	C	Hydrofluoric Acid	40%	C	C	Triethanolamine		A	A
Carbon Dioxide		A	A	Hydrofluoboric Acid		A	A	Tricresyl Phosphate		C	C
Carbon Disulphite		C	C	Hydrofluosilicic Acid		A	A	Turpentine		B	C
Carbon Monoxide		A	A	Hydrogen Peroxide		A	-	Urea		A	A
Carbon Tetrachloride		C	C	Hydrogen Sulphide		A	-	Vinegar		A	A
Casein		A	B	Iso-Octane		A	B	Vinyl Acetate		C	C
Chlorine	Dry Gas	A	A	Isopropyl Acetate		C	C	Vinyl Chloride		C	C
Chlorine	Wet Gas	B	C	Kerosene		B	B	Water		A	A
Chlorine	Water	C	C	Ketones		C	C	Xylene		C	C
Chlorobenzene		C	C	Lactic Acid	10%	A	-	Zinc Chloride		A	A
Chloroform		C	C	Lactic Acid	100%	C	C	Zinc Sulphate		A	A
Chromic Acid		A	B	Lacquer Solvents		B	C				
Citric Acid		A	A	Linseed Oil		A	A				
Coal Tar		C	C	Lubricating Oils		A	A				
Copper Chloride		A	A	Magnesium Chloride		A	A				
Copper Nitrate		A	A	Magnesium Hydroxide		A	A				
Copper Sulphate		A	A	Magnesium Sulphate		A	A				
Cottonseed Oil		B	C	Malic Acid		A	A				
Creosote		C	C	Methyl Acetate		C	C				
Cresol		A	B	Methyl Bromide		C	C				