



# SF-55




**Code: SF-55 GRAY**

Recommended for sprinkler, pivot and water transport – this hose has less diameter growth and elongation

therefore allowing for much greater ease of re-coupling after use.

Text Size:

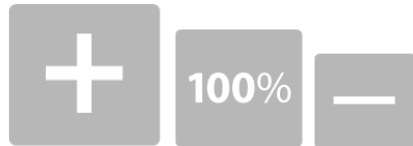

**TOUGH HEAVY DUTY APPLICATIONS:** Sprinkler, Pivot & Traveler, Water Transportaion. (Pivot & Traveler use 3", 4", 5", 6" only)

**TEMP. RANGE:** -5°F to 170° F. When Temperature is -15°C and Colder, please DO NOT Handle or Transport Hoses.

**CONSTRUCTION:** 3-Ply Polyester Yarns. Both tube and cover are extruded simultaneously to obtain maximum bonding.

**CAUTION:** For liability purposes, if temperature exceeds 110° F the working pressure will go down. Please check with factory to ensure sufficient safety factor.

NORMAL SIZE	I.D	APPROX. WALL	MAX. W.P. at 70°F psi	APPROX. Wt. 300ft
1-1/2"	1.61"	0.063"	150 psi	60 lbs
2"	2.08"	0.087"	150 psi	108 lbs
3"	3.07"	0.100"	150 psi	194 lbs
4"	4.13"	0.114"	100 psi	280 lbs
5" (128 mm)	5.07"	0.130"	100 psi	400 lbs
6"	6.10"	0.146"	100 psi	500 lbs
8"	8.19"	0.197"	80 psi	766 lbs

# Industrial Specifications

NOMINAL SIZE	MAX W.P. AT 70°F psi	DESIGN B.P. psi
8"	160	480